

DYNAMIC


SILVER SERVICE

OPENING DOORS FOR BUSINESS

The Dynamic Silver Service team are dedicated to providing responsive, fast and effective service. Our clients depend on us to have their shop fronts and entries opening for business and closing for security.

PARAVENT WIDEBODY & SLIMLINE by DYNAMIC CLOSURES

SIDE FOLDING PERFORATED ALUMINIUM CONCERTINA DOORS

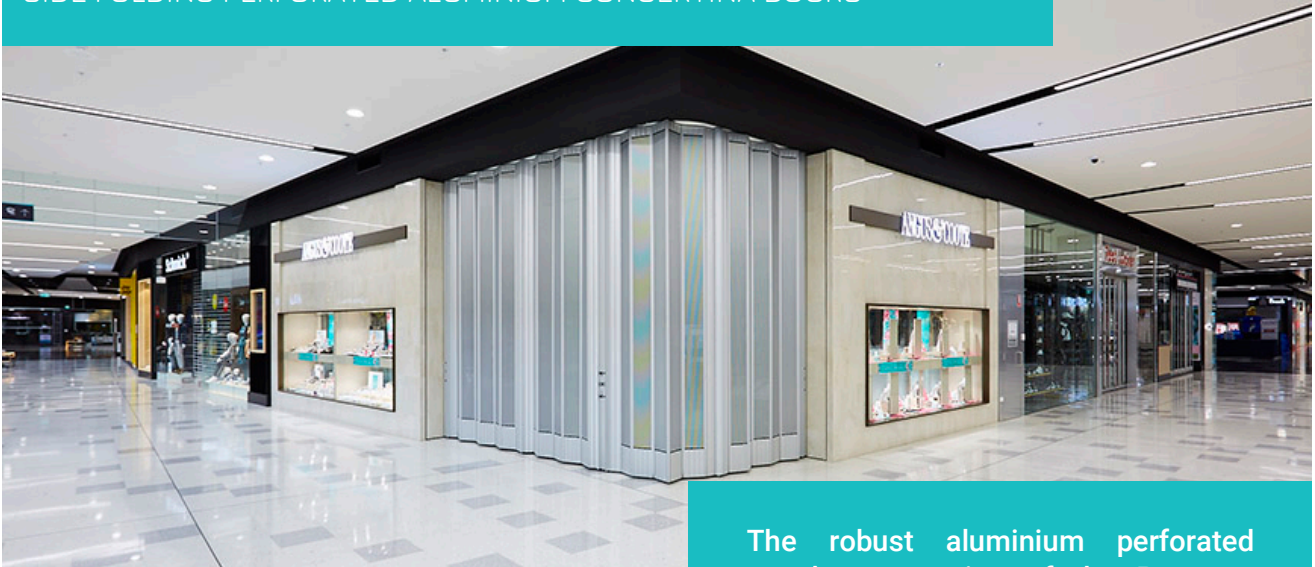

Paravent Widebody & Slimline (side folding door) is part of Dynamic Closures' WIDEBODY® range. Made with durable materials and a flexible design suitable for a variety of internal or external situations. Offering up to 51% visibility and airflow. Paravent Slimline is the perfect solution for:

- **Commercial shop fronts**
- **Shopping centres**
- **Shop windows**
- **Retail outlets**
- **Serveries**
- **Counters**
- **Bars & restaurants**
- **Hotel kitchens**
- **Kiosks**
- **Patios**
- **Cafés**

The robust aluminium perforated panel construction of the Paravent Widebody & Slimline curtains provides up to 51% visibility and airflow offering a functional and protective enclosure with contemporary style.

Paravent Widebody & Slimline is specially designed for ease of operation and offers a **quality and economical option**. Equipped with an inbuilt **premium locking and tracking system** and it has versatility to accommodate **smaller stacking sizes**.

SPECIFICATIONS

CURTAIN

Paravent Slimline® curtain design shall incorporate **205mm O/A (w) x 101mm (h)** truss-like aluminium panels at top and bottom of enclosure, with a **160mm (w) x 2.6mm** aluminium infills with 4.5mm perforations providing 51% visibility. **Maximum height 5000mm.**

Paravent Wide Body® curtain design shall incorporate **285mm O/A (w) x 101mm (h)** truss-like aluminium panels at top and bottom of enclosure, with a **240mm (w) x 2.6mm** aluminium infills with 4.5mm perforations providing 51% visibility. **Maximum height 5000mm.**

PARAVENT WIDE BODY 300MM PERFORATED PANEL



OPTIONAL EXTRAS:
Egress Doors for emergency exits.
Tapered openings.

CURTAIN EDGES

Shall be **32mm x 53mm** extruded vertical members, with top and bottom automatically retractable locking posts. One intermediate member shall be provided for every **3000mm** of opening. All intermediate members shall be fitted with adjustable, concealed drop bolts. Intermediate member spacing on counter applications **1800mm**

LOCKING

Lead posts shall be provided with cylinder locks and guards, operable from both sides. Master keyed cylinders (if required), shall be supplied by others. Top and bottom shoot bolt locking as standard. Dust proof floor sockets shall be provided. Electro – magnetic locking is available as an optional addition.

COLOURS

The standard finish for all visible aluminium components on Paravent Slimline closures is a **clear anodised matt finish**. Optional extra powder coating in Dulux colour range is available.

HEAD TRACK

The track extruded aluminium **38mm (h) x 36mm (w)**. Curved tracks (where required) are supplied with a standard radius.

STANDARD RADIUS:

45 degree - 407mm and 559mm

90 degree - 407mm and 559mm

CURTAIN WEIGHT

Curtain weight is **11 kg** per square metre. This may vary depending on locking post types and amounts.

To provide smooth and easy operation for **custom** curved applications, the radius must be nominated (minimum **1500mm**). For elliptical curves, a template must be provided to Dynamic Silver Service prior to manufacture.

Dynamic Silver Service is continually researching and developing products and reserves the right to change specifications without notice.

Contact Us

ADDRESS: 25A/1-3 ENDEAVOUR ROAD
CARINGBAH NSW 2229

PHONE: 02 9531 8542

AFTER HOURS: 0401 333 776

EMAIL: service@dynamicssilverservice.com.au