


OPENING DOORS FOR BUSINESS

The Dynamic Silver Service team are dedicated to providing responsive, fast and effective service. Our clients depend on us to have their shop fronts and entries opening for business and closing for security.

PRESTIGE WIDEBODY & SLIMLINE® by DYNAMIC CLOSURES

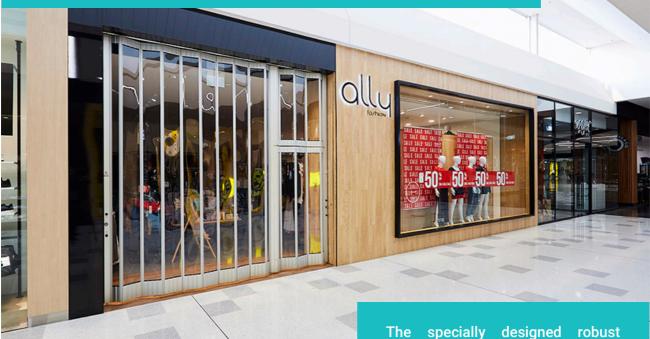

Widebody & Slimline[®] (side folding doors) are part of Dynamic Closures' PRESTIGE® range. Made with durable materials and a flexible design suitable for variety of internal or external situations. PRESTIGE is the perfect solution for:

- Commercial shop fronts
- Shopping centres
- Shop windows
- Retail outlets
- Serveries
- Counters
- Bars & restaurants
- Hotel kitchens
- Kiosks
- Patios
- Cafés

The specially designed robust aluminium and polycarbonate panel construction of the Prestige curtain provides a strong protective barrier with easy operation and contemporary style.

Prestige offers a **quality and** economical option, equipped with an inbuilt **premium locking and tracking** system, and it has versatility to accommodate smaller stacking sizes.

SPECIFICATIONS

CURTAIN

Prestige Slimline® design shall incorporate **205mm O/A (w)** x **101mm (h)** truss-like aluminium panels at top and bottom of curtain with **160mm (w)** wide clear polycarbonate infills with each individual panel encapsulated top and bottom with a vinyl retainer. **5000mm** maximum height.

Prestige Wide Body® (polycarbonate) design shall incorporate **285mm O/A (w)** x **101mm (h)** truss-like aluminium panels at top and bottom of enclosure, with a **240mm (w)** wide self-extinguishing panels fitted into one piece of aluminium tubular hinge sections. Polycarbonate strips shall be interlocking into aluminium hinge.

CURTAIN EDGES

Shall be **32mm** x **53mm** extruded vertical members, with top and bottom automatically retractable locking posts. One intermediate member shall be provided for every **3000mm** of opening. All intermediate members shall be fitted with adjustable, concealed drop bolts. Intermediate member spacing on counter applications **1800mm** maximum.

COLOURS

The standard finish for all visible aluminium components on Prestige Wide Body closures is a **clear anodised matt finish**. Optional extra powder coating in limited colours is available.

CURTAIN WEIGHT

Curtain weight is **11 kg** per square metre. This may vary depending on locking post types and amounts.

LOCKING

Lead posts shall be provided with cylinder locks and guards, operable from both sides. Master keyed cylinders (if required), shall be supplied by others. Top and bottom shoot bolt locking as standard. Dust proof floor sockets shall be provided. Electro-magnetic locking is available as an optional addition.


HEAD TRACK

The track extruded aluminium **38mm (h)** x **36mm (w).** Curved tracks (where required) are supplied with a standard radius.

STANDARD RADIUS:

45 degree - 407mm and 559mm 90 degree - 407mm and 559mm

To provide smooth and easy operation for **custom** curved applications, the radius must be nominated (minimum **1500mm**). For elliptical curves, a template must be provided to Dynamic Silver Service prior to manufacture.

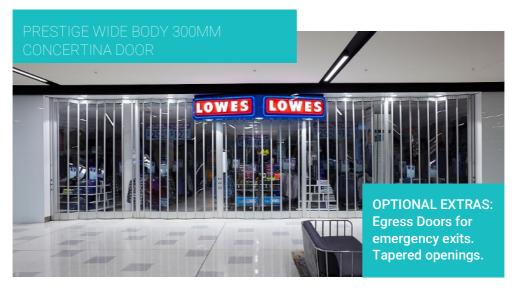

Dynamic Silver Service is continually researching and developing products and reserves the right to change specifications without notice

Contact Us

ADDRESS: 25A/1-3 ENDEAVOUR ROAD CARINGBAH NSW 2229 PHONE: 02 9531 8542 AFTER HOURS: 0401 333 776 EMAIL: service@dynamicsilverservice.com.au