

# DYNAMIC

## SILVER SERVICE

### *OPENING DOORS FOR BUSINESS*

The Dynamic Silver Service team are dedicated to providing responsive, fast and effective service. Our clients depend on us to have their shop fronts and entries opening for business and closing for security.

#### PROSecure® 36 SOLID

#### ROLLER SHUTTER SYSTEM



Constructed with high quality aluminium and alloy for strength and durability designed to withstand harsh environmental conditions and provide maximum security against intruders.

The PROSecure® 36 Solid Roller Shutter System is made with a precision extruded roller shutter slimline profile that is ideal for high security applications. Suitable for commercial and industrial grade sites including:

- **Banks**
- **Jewellery shops**
- **Mobile kiosks**
- **Commercial shop fronts**
- **Sports centres**
- **Clubs, restaurants and cafes**
- **Shopping centre entrances**
- **High security spaces**

### FEATURES

- High quality, strong aluminium alloy construction
- Commercial grade double wall extruded profile for heavy duty strength
- High quality powder coated finish for maximum abrasion resistance
- Double line grooved and slight curved face profile (smooth and slight curved face available)
- Roll-tight design
- Range of colours
- Heavy duty steel axle with high quality internal sealed bearings
- Suitable for widespan widths up to 5800mm
- Can be manually operated or motorised
- Made in Australia

# SPECIFICATIONS AND OPERATIONAL REQUIREMENTS

## MAXIMUM OPENING DIMENSIONS

Up to 5000mm Wide X 3000mm High  
Motorised with 240V Motor Drum Axle with  
optional built-in safety brake system.

## COLOURS AND FINISH


A range of standard colours available  
or high quality powder colours  
available on request.

## INSTALLATION SECURITY

Mounted on 90 X 90 X 5 (RHS)  
Full Height RHS Steel Support Posts – Floor  
to Ceiling. Or 90/90 timber posts by builder.

## TRACK GUIDES

36mm double walled aluminium slats -  
68mm X 25mm X 14mm guides.

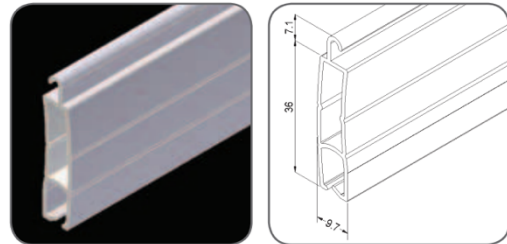

36mm extruded double line  
grooved profile also available  
with perforations. 36mm  
extruded smooth face profile  
also available.

## SHUTTER SLATS


36mm double walled aluminium slats.

## OPERATION

Requires 500mm X 500mm side room in  
ceiling area from opening width on both  
sides.

Internal and external key switch operation  
available including emergency egress exit  
switch or manual operation with spring  
balanced drum. Crank Handle for manual  
override fitted directly below motor.

UPS backup available.  
240V mains supply – 240V switching  
controller.



## TECHNICAL SPECIFICATIONS

Maximum shutter width	5800mm (with winged slat locks)
Maximum shutter height	3000mm
Maximum surface area	12m <sup>2</sup>
Curtain weight/metre <sup>2</sup>	7.5kg
Number of slats/metre	28
Profile slat covering	36mm
Profile slat thickness	9.7mm
Axle types	Octagonal steel
Bottom bar dimensions	55mm x 8.5mm
Guide dimensions	68mm x 25mm/14mm (heavy duty guide)
Paint finish for Profiles	Colour options include cream, clear beige, white, anodised silver, magnolia cream and woodland grey.
Paint finish for Pelmet, Side Frames, Guides and Bottom Bars	Colour options include cream, clear beige, white, black, magnolia cream and woodland grey. Optional powder coated finish.

## PELMET SIZES AND MAXIMUM SHUTTER HEIGHT

### STANDARD SLAT LOCKS

PELMET BOX SIZE	MAX NO. OF SLATS	MAX SHUTTER HEIGHT	AXLE SIZE
180mm	50	1800mm	60mm
205mm	56	2020mm	70mm
230mm	72	2600mm	70mm
250mm	90	3250mm	70mm
250mm	85	3050mm	101mm with adaptor
250mm	72	2590mm	130mm with adaptor

### WINGED SLAT LOCKS

180mm	38	1350mm	60mm
205mm	46	1650mm	70mm
230mm	62	2300mm	70mm
250mm	72	2600mm	70mm
250mm	78	2800mm	101mm with adaptor
250mm	65	2350mm	130mm with adaptor

