

DYNAMIC


SILVER SERVICE

OPENING DOORS FOR BUSINESS

The Dynamic Silver Service team are dedicated to providing responsive, fast and effective service. Our clients depend on us to have their shop fronts and entries opening for business and closing for security.

PROSECURE® 50 VISION

ROLLER SHUTTER SYSTEM

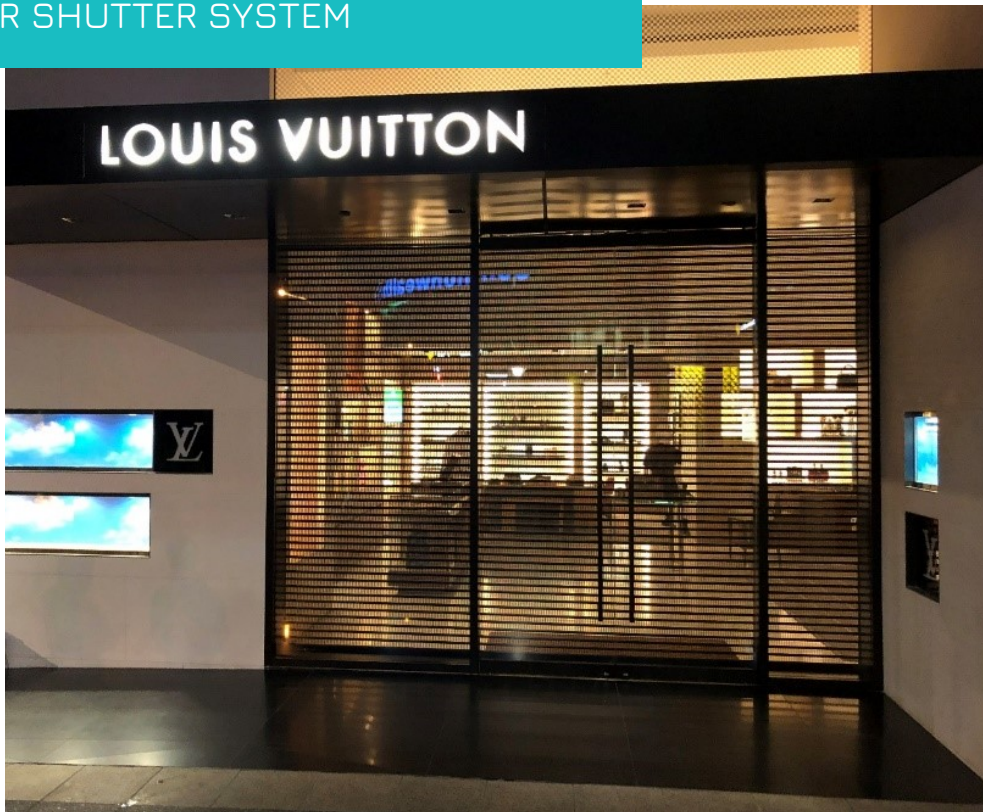

The PROSecure® 50 Vision Roller Shutter System is made with a precision extruded roller shutter slimline profile, with approximately 20% vision and ventilation perforations. Suitable for commercial and industrial grade sites including:

- **Mobile kiosks**
- **Commercial shop fronts**
- **Sports centres**
- **Clubs, restaurants and cafes**
- **Shopping centre entrances**

FEATURES

- High quality, strong aluminium alloy construction
- Commercial grade single wall extruded profile for heavy duty strength
- Vision and ventilation perforations for airflow and light
- High quality powder coated finish for maximum abrasion resistance
- Perforated curved face profile
- Roll-tight design
- Range of colours
- Heavy duty steel axle with high quality internal sealed bearings
- Suitable for widespan widths up to 5800mm
- Can be manually operated or motorised

SPECIFICATIONS AND OPERATIONAL REQUIREMENTS

MAXIMUM OPENING DIMENSIONS

Up to 5500mm Wide X 3000mm High
Motorised with 240V Motor Drum Axle with optional built-in safety brake system.

COLOURS AND FINISH

A range of standard colours available or high quality powder colours available on request.

INSTALLATION SECURITY

Mounted on 90 X 90 X 5 (RHS)
Full Height RHS Steel Support Posts – Floor to Ceiling. Or 90/90 timber posts by builder.

TRACK GUIDES

Double walled aluminium guides - 68mm X 25mm X 14mm.

SHUTTER SLATS

50mm single walled perforated aluminium slats.

OPERATION

Requires 500mm X 500mm side room in ceiling area from opening width on both sides.


Internal and external key switch operation available including emergency egress exit switch or manual operation with spring balanced drum. Crank Handle for manual override fitted directly below motor.

UPS backup available.
240V mains supply – 240V switching controller. 10 or 15 Amp Circuit depending on shutter size



TECHNICAL SPECIFICATIONS

Maximum shutter width	5500mm (with winged slat locks)
Maximum shutter height	3000mm
Maximum surface area	9m ²
Curtain weight/metre ²	8.5kg
Number of slats/metre	20
Profile slat covering	50mm
Profile slat thickness	10.8mm
Axle types	Octagonal steel
Bottom bar dimensions	67mm x 10mm
Guide dimensions	68mm x 25mm/18mm
Paint finish for Profiles	Colour options include cream, clear beige, white and anodised silver.
Paint finish for Pelmets, Side Frames, Guides and Bottom Bars	Colour options include cream, clear beige, white and black. Optional powder coated finish.

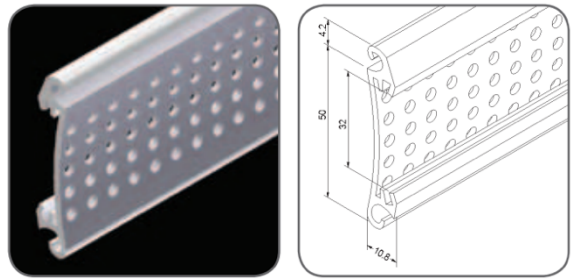

Constructed with high quality aluminium and alloy for strength and durability. Perforated slats permit subtle vision, light and airflow.

PELMET SIZES AND MAXIMUM SHUTTER HEIGHT

STANDARD SLAT LOCKS

PELMET BOX SIZE	MAX NO. OF SLATS	MAX SHUTTER HEIGHT	AXLE SIZE
180mm	33	1750mm	70mm
205mm	44	2350mm	70mm
230mm	56	2950mm	70mm
250mm	70	3700mm	70mm
250mm	64	3350mm	101mm with adaptor
250mm	55	2900mm	130mm with adaptor

WINGED SLAT LOCKS

180mm	23	1250mm	60mm
180mm	17	950mm	70mm
205mm	36	1900mm	70mm
230mm	44	2300mm	70mm
250mm	50	2600mm	101mm with adaptor

Dynamic Silver Service is continually researching and developing products and reserves the right to change specifications without notice.

Contact Us

ADDRESS: 25A/1-3 ENDEAVOUR ROAD
 CARINGBAH NSW 2229
 PHONE: 02 9531 8542
 AFTER HOURS: 0401 333 776
 EMAIL: service@dynamicssilverservice.com.au